

RELAYS & SWITCHES

BOXED ISOLATE AUXILIARY RELAY




Technical Specifications

Operating Voltage	24v dc (nominal)
Contact Rating	250v ac 8A, double pole changeover
Current Consumption	Normal: 0mA Isolated LED only: 5.3mA LED + buzzer: 7.8mA LED + relay: 12.1mA LED + relay + buzzer: 12.8mA Triggered: 18.3mA
Enclosure	ROHS compliant FR ABS - 87 W x 87 H x 44 D (mm)

Order Codes

BRISOL-R	Aux isolate relay, red
----------	------------------------

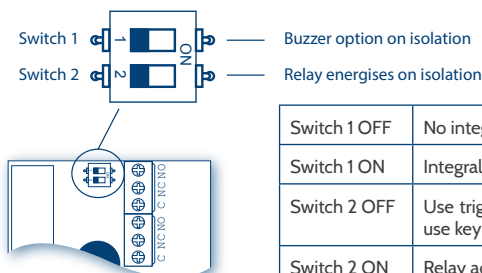

Switch 1 OFF	No integral buzzer on isolation
Switch 1 ON	Integral buzzer sounds on isolation
Switch 2 OFF	Use trigger input (TRG) to activate relay - use key switch to isolate
Switch 2 ON	Relay activated via key switch

- 8 amp 24v double pole changeover relay
- Contacts rated @ 250v ac
- 'Isolated' LED indicator
- Selectable internal buzzer
- Option to use key switch to energise the relay
- Suitable for surface or flush fitting



+44 (0) 1895 546205