

# RELAYS & SWITCHES

## TIMER/PULSING RELAY WITH ISOLATE




### Technical Specifications


Operating Voltage	24v dc (nominal)
Contact Rating	250v ac 8A, double pole changeover
Current Consumption	Normal: 7.5mA
	Isolated LED only: 24mA
	LED + buzzer: 38mA
	LED + relay: 43mA
	LED + relay + buzzer: 57mA
	Triggered: 24mA
Enclosure	ROHS compliant FR ABS - 87 W x 87 H x 44 D (mm)

### Order Codes

BRTIMER	Timer/pulsing relay - boxed
RECARD-TMR	Timer/pulsing relay - PCB only

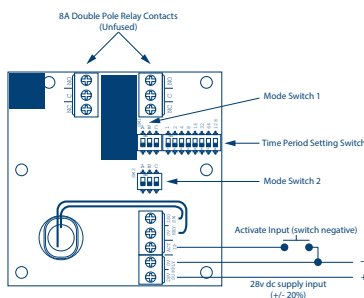

- 8 amp 24v double pole changeover relay
- Contacts rated @ 250v ac
- Two colour relay status LED indicator
- Delay timer mode - 0 - 255 seconds, minutes or hours
- Pulsing relay mode - on & off times individually set from 0 - 255 seconds
- Boxed version supplied with relay isolate key switch



**+44 (0) 1895 424505**