ESENTO®
EVOQUE

16 - 32 ZONE CONVENTIONAL FIRE CONTROL PANELS

- 16 - 32 zones

- Network up to 8 control panels

- 3 modes to manage false alarms

- 4 sounder circuits

- Approved to EN54-2 & 4

- 3 year warranty

- Programmable relays & outputs

- One man walk test

- Fully functional LCD remote display units

LPCB
LOSS PREVENTION CERTIFICATION BOARD
Cert No. 810a

+44 (O) 1895 546205

ESENTO
EVOQUE

Esento Evoque is our large conventional fire panel offering and is available with 16, 24 or 32 zones. These fire panels include most of the engineering functions of the flag ship Excel 2-12 zone panel including 3 false alarm management modes and in-built networking capabilities. Up to 8 Esento Excel or Evoque panels can be networked to provide up to 256 zones! The Esento range also includes a fully functional LCD remote display unit, relay & output card and a sounder circuit extension card. The display uses super bright, clearly labelled LED indicators and the simple colour coded buttons gives the end user the confidence to correctly manage their fire alarm system.

NETWORK UP TO
8
CONTROL PANELS AND REPEATERS

Networking is available across all Excel & Evoque control panels. With the simple addition of a comms card up to 8 control panels can be networked in a fault tolerant loop. The network is fail safe, a single open or short circuit on the loop will not stop the communications. Any combination of panel size can be used from 2 to 32 zones and in any order.

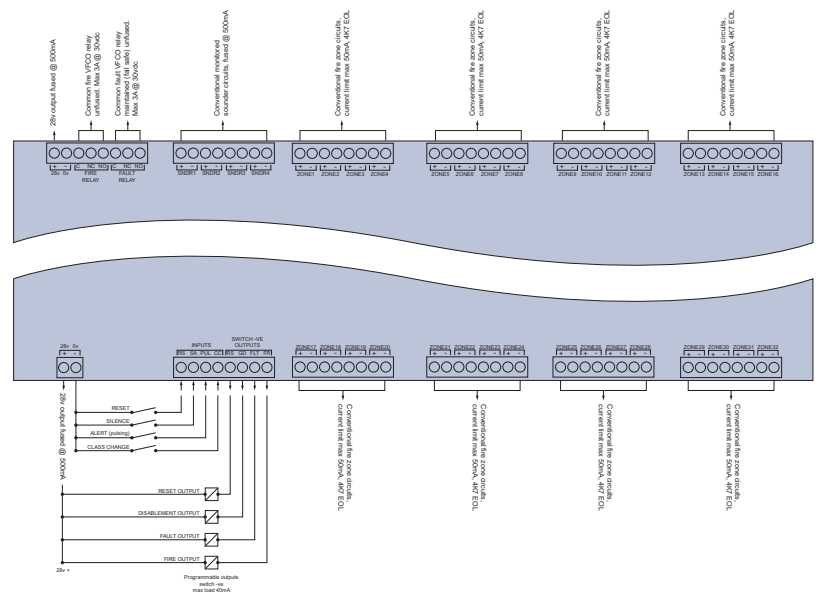In addition to the 8 control panels up to 8 repeater panels or remote display units can be added to the network.

1 2 3 4 ENTER

Simple programming using the four numbered key pad buttons

Programming Features

- Non latching zones
- 3 x False alarm management modes
- Set delays to outputs
- Two independent programmable inputs
- All outputs, relays and sounder circuits are independently programmable
- Disable zones, sndr ccts, aux & delays

Technical Specification

No of zones	16 , 24, 32
Cabinet size	465mm W x 410mm H x 130mm D
Battery capacity	Min: 2 x 7Ah 12v SLA, Max: 2 x 18Ah 12v SLA

Order Codes

XL32-16	Control panel, 16 zones, 4 sounder ccts
XL32-24	Control panel, 24 zones, 4 sounder ccts
XL32-32	Control panel, 32 zones, 4 sounder ccts
XLEN-R-12	12 zone fully functional/passive repeater panel
XL-RDU	LCD remote display unit
TPCA05	Network comms card
OPCARD-8	8 way relay/output card
SNDEXT-4	4 way sounder cct extension card
FMK-XL32	Recessing bezel for control panels
FMK-ECL	Recessing bezel for XLEN-R-12 repeater panel

HAES

Unit 3, Horton Industrial Park, West Drayton, UB7 8JD, United Kingdom

Tel: +44 (0) 1895 546205
Direct Sales Line: +44 (0) 1895 546205

Email: info@haes-tech.com
Web: www.haes-tech.com